



Item: 15t Front-end loader

Chain

- ✓ 4 x 13mm transport chain with claw hooks or winged grab hooks
- ✓ 4 x Turnbuckle tensioners
- ✓ Protect chains over sharp edges to maintain their full lashing capacity.


Note

- ✓ Replace all worn or defective equipment
- ✗ Do not transport with engine running
- ✓ All doors and hatches locked
- ✓ Ensure tyres are inflated.

Load Restraint

- ✓ Attach chain to manufacturers rated points only
- ✓ Hydraulic and mechanical equipment must be isolated and pressure released
- ✓ Apply brakes and turn engine off
- ✓ Place rubber load mat under forks/bucket.

SAMPLE ONLY - LOADING PLAN

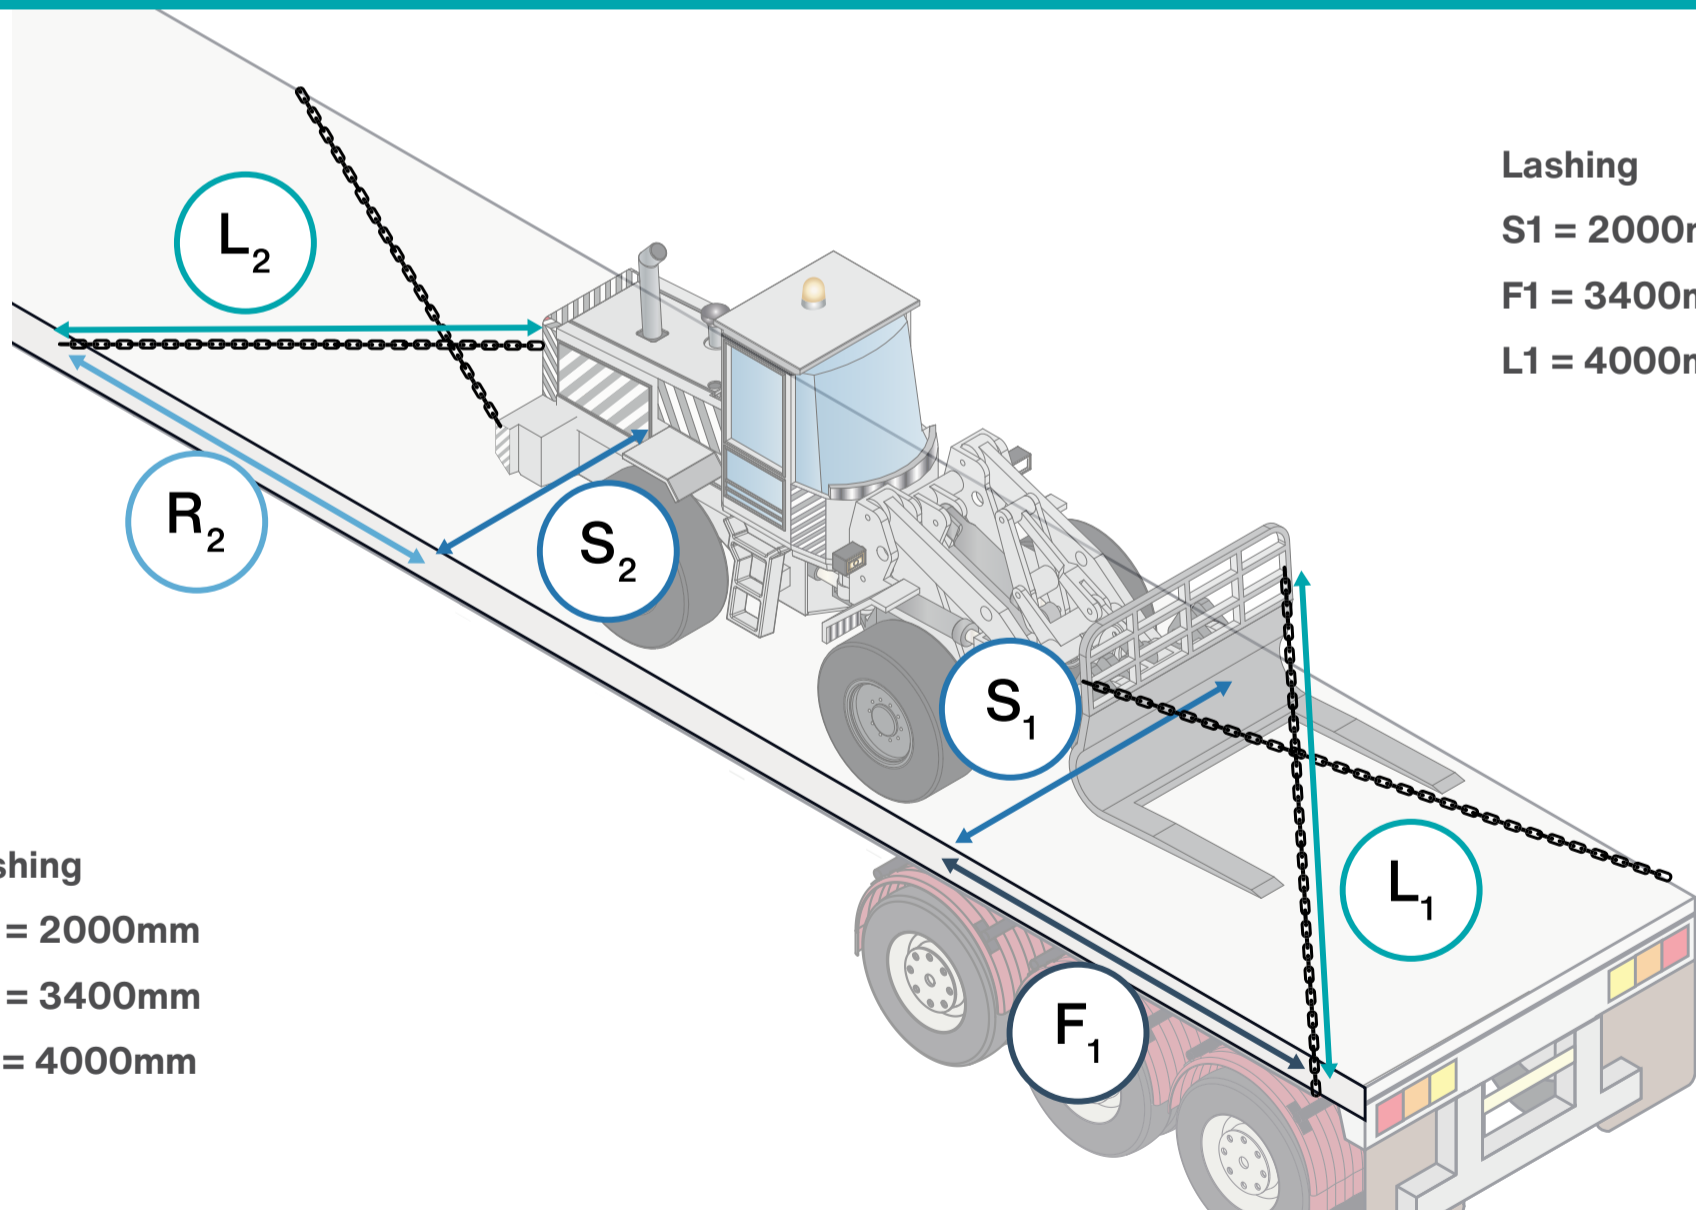

Developed by _____

Responsible entity _____

Review date _____